



HSF

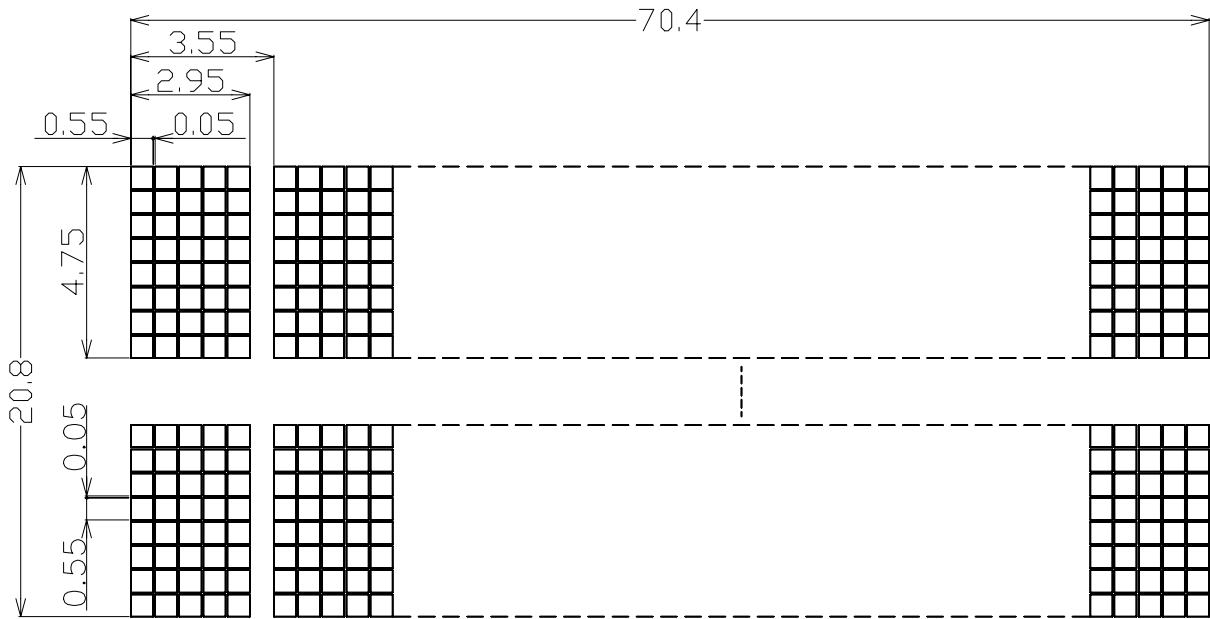

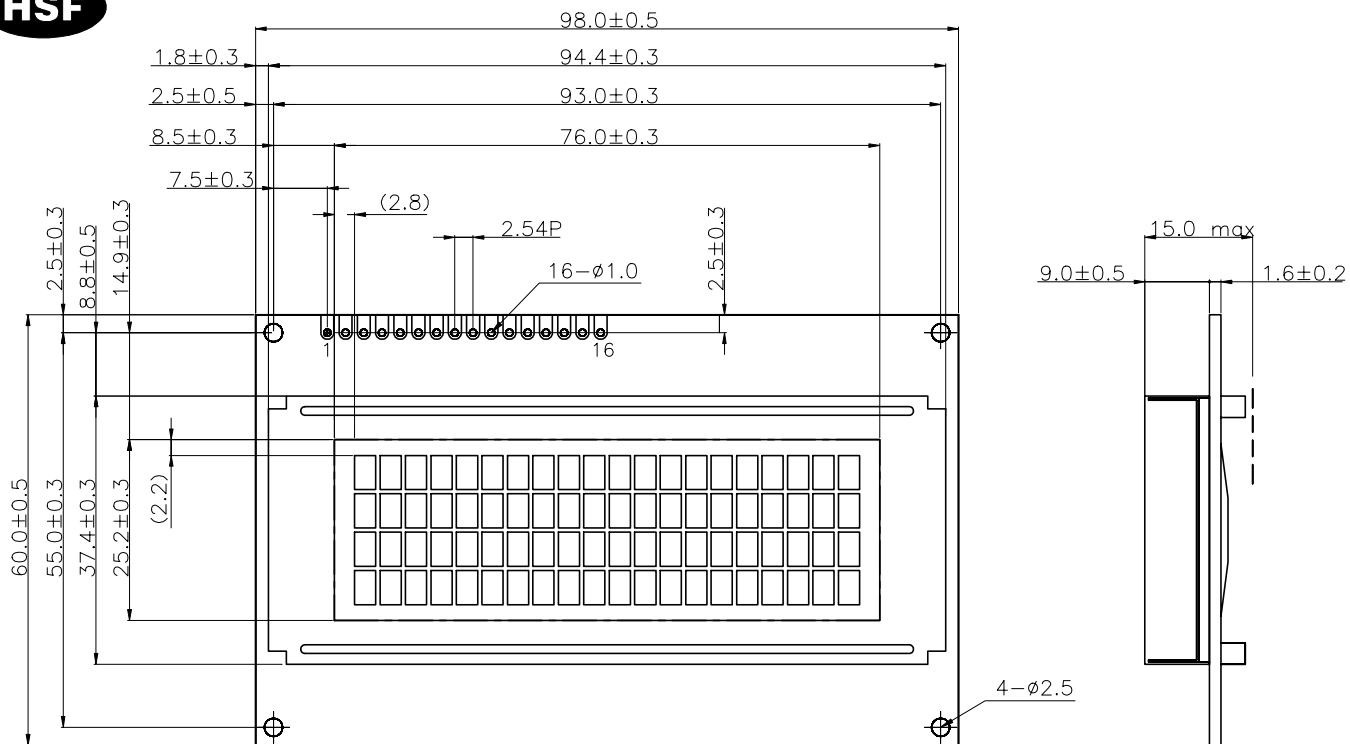

Interface pin connection

| | | | | | | | | |
|---------|-----|-----|-----|-----|--------------|-----|------|------|
| PIN NO. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| SYMBOL | Vss | VDD | Vo | RS | R/ \bar{W} | E | DB0 | DB1 |
| PIN NO. | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| SYMBOL | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | A(+) | K(-) |

NOTE:

1. DISPLAY TYPE: STN(YELLOW-GREEN)
2. DRIVE METHOD: 1/16DUTY
3. OPERATING VOLTAGE: VDD=5.0V;VDD-V0=4.6V
4. OPERATING TEMP: -20° ~ 70°C
5. STORAGE TEMP: -20° ~ 70°C
6. VIEWING DIRECTION: 6 O'CLOCK
7. POLARIZER MODE: TRANSLLECTIVE/POSITIVE
8. CONNECTION: ZEBRA
9. LED BACKLIGHT COLOR:YELLOW-GREEN

| | | | | | | | |
|---------|-----------|---|-----|------------|-------|---------------|---|
| REVISES | |  SUN-VIEW TECHNOLOGY CO., LTD | | | | PROJECTION |  |
| DATE | CONTENT | | | | | UNITS | |
| 01 | 1st ISSUE | CUSTOM | | | | | |
| | | DRAWING BY | 沈光娥 | 2015.07.29 | ITEM | MD | |
| | | CHECKED BY | | | CODE | MD260315002 | SCALE |
| | | APPROVED BY | | | MODEL | SVC020004AYLB | SHEET 1 OF 1 |