
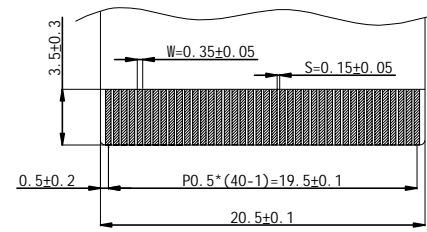
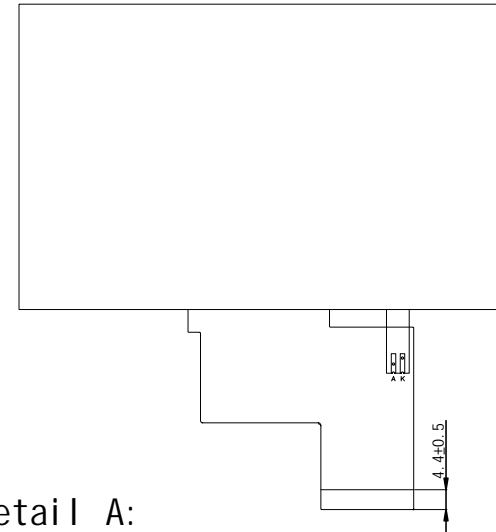
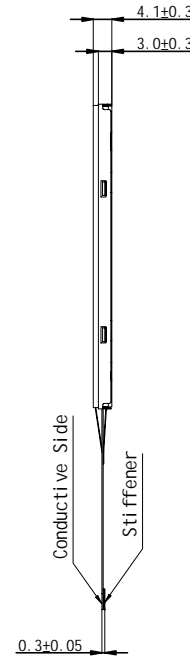


Customer Approved

VER	CHANG CONTENT	DATA
VO	FIRST EDITION	2015.04.08
V1	替換LCD, 修改FPC外型.	2019.01.14

HSF

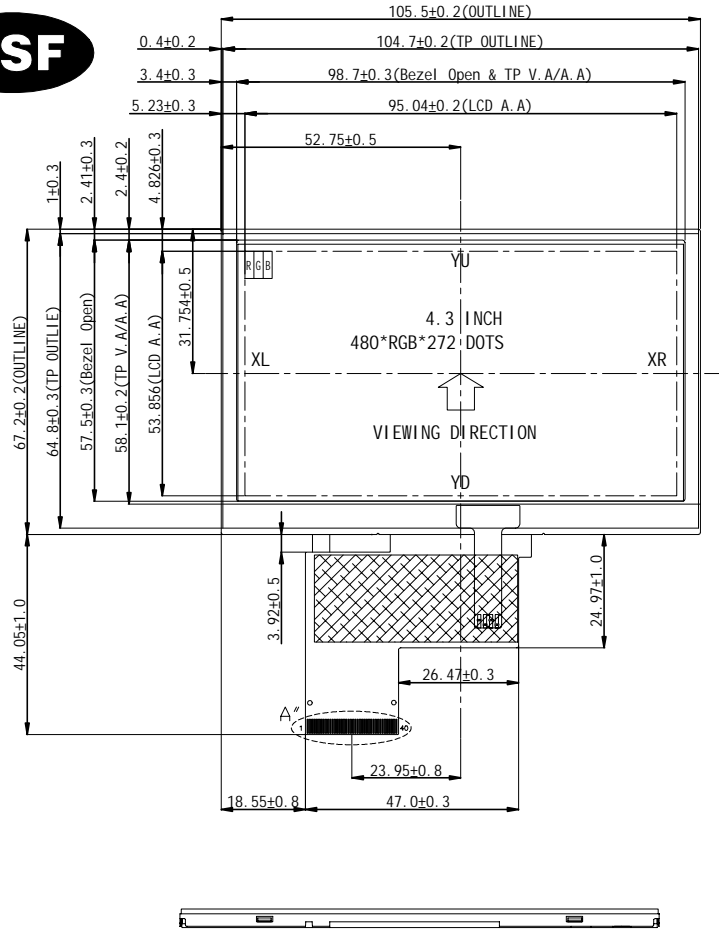


NOTE: (1) UNIT : mm
(2) SCALE: NTS

Pin no.	Symbol
1	VLED-
2	VLED+
3	GND
4	VDD
5	RO
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DI SP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

DISPLAY TYPE:	4.3" TFT	DIPALY DRIVER:	ILI6485A	PIXEL SIZE:	0.198 X 0.198 mm	產品型號:	SVF'043004ANR				
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X9), 9串1并	部品型號:	LCM外形圖		核准:		
VIEWING DIRECTION:	6 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C			版本:	V1	單位:	mm	審核:	
DOT MATRIX:	480(RGB)X272 DOTS	STRUCTURE:	LCD+IC+FPC+BL+RTP	MATERIAL NOTE	ROHS REQUEST	日期:	2019.01.14	比例:	1 : 1	設計:	謝鳳嬌



旭璟光電科技(惠州)有限公司
SUN VIEW TECH. CO., LTD



UNMARKED TOLERANCE: ±0.20 mm

頁碼:

1 OF 1