

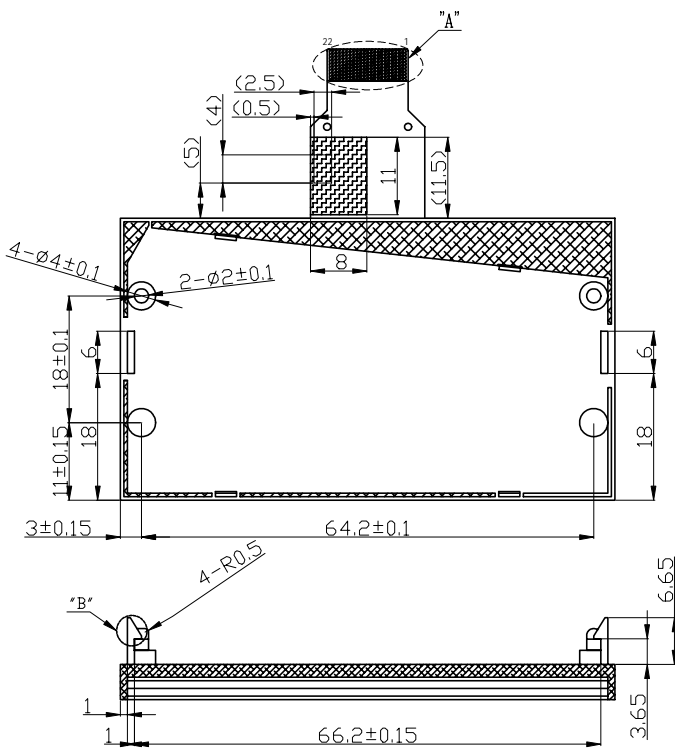
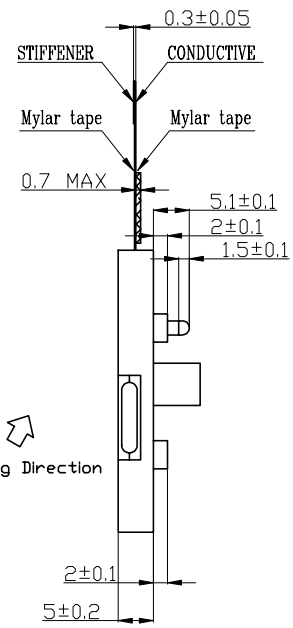
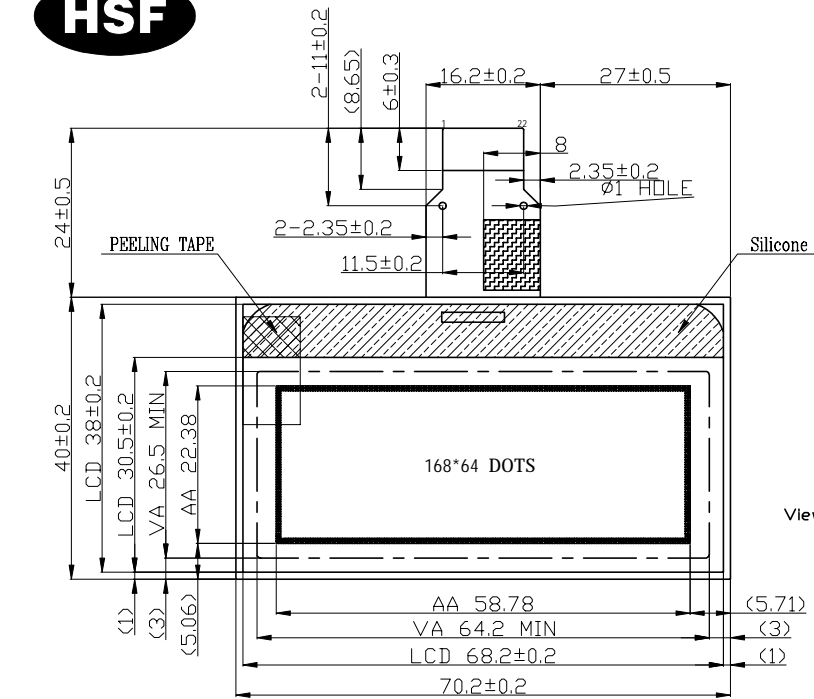



HSF



PIN	NAME
1	VSS
2	SDA(D3)
3	SCL(D0)
4	RST
5	A0
6	CS
7	VSS
8	VDD
9	NC
10	VO
11	XV0
12	VSS
13	VG
14	VSS
15	VSS
16	VSS
17	VSS
18	VSS
19	NC
20	NC
21	LEDA
22	LEDK

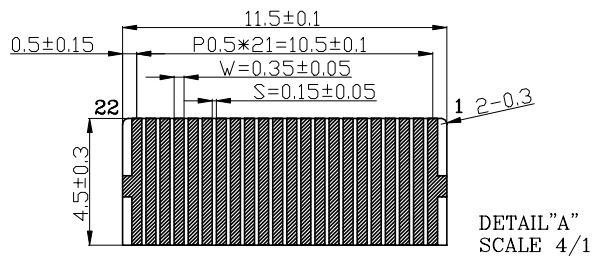

SECTION A-A
 Mylar Tape
 Solder Area

- NOTE:
1. DISPLAY TYPE:STN(GRAY)
 2. DRIVING METHOD: 1/65 DUTY, 1/9 BIAS
 3. OPERATING VOLTAGE: 9.0 VOP
 4. OPERATING TEMP: -20° ~ 70°C
 5. STORAGE TEMP: -30° ~ 80°C
 6. VIEWING DIRECTION: 6 O'CLOCK
 7. POLARIZER MODE: TRANSMISSIVE/POSITIVE
 8. CONNECTION: FPC 小片在上 磨边
 9. IC:ST7525-G4
 10. DIMENSIONS ARE IN MILLIMETERS AND UNLESS OTHERWISE NOTED ARE ±0.20MM

REVISES	SUN-VIEW TECHNOLOGY CO., LTD						
CONTENT	CUSTOM						
	DRAWING BY	沈光娥	2015.12.09	ITEM	LCM	PROJECTION	
	CHECKED BY			CODE	MD080715001	UNITS	mm
	APPROVED BY			MODEL	SVG168064AGDC	SCALE	
						SHEET	1 OF 1